

DAOU[®]

COMMERCIAL-GRADE LED BOLLARDS
EN 2025



MARKING OUT PATHS

Bollard luminaires are commonly used to indicate pedestrian paths and illuminate potential obstacles, keep traffic away from people, gardens and buildings. Also they can become a featured addition to illuminate and accent landscaping, walkways, architectures, parks and other urban spaces.

We design and manufacture our bollard luminaires with the latest LED technology that ideal for creating a comfortable exterior atmosphere, our LED bollard luminaires are minimalist and appealing as well as durable, they offer exceptional quality, performance and reliability with superior visual comfort and uniformity thanks to excellent optical system.



THE ART & SCIENCE

Artistry and science may seem like opposing crafts, but in professional outdoor landscape lighting applications, they come together for an exceptional result. Luminaires function because of scientific processes that produce electricity, but light also has the power to bring out the beauty and elegance of a space. When a creativelighting designer combines the principles of art and science, the result is truly stunning.

Bollard luminaires allow people to continue to enjoy the warm atmosphere of a outdoor space even when it is dark out. And it can make exteriors more dramatic, with well-placed luminaires casting intriguing shadows and highlighting the best elements and telling the meaning of light art. The color of the light, as well as the contrast of light and shadows will set the mood of an illuminated space or structure.

Each of art and science has a unique role to play in outdoor landscape lighting applications. Without art, a basic lighting installation looks boring or uninspired; without science, even the most attractive display could burn out. Combining the two results in a completely transformed outdoor living atmosphere for people to enjoy.

PRODUCT INDEX



ATLAS
10W - 30W
P. 09



EIKO
15W - 30W
P. 13



GIGA
10W - 20W
P. 15



KUBIX
10W
P. 25



CLIVO
12W - 24W
P. 29



LONG
10W
P. 17



ZEE
10W
P. 21



KISA
10W
P. 23



FLAT
10W - 20W
P. 33



PORTO
10W - 20W
P. 35



ATLAS




- RAL9006
- RAL9005
- RAL7016
- RAL7043

ATLAS LED BOLLARD 600MM Φ120



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
10	800	3000	⚡ AC220~240V ON/OFF	BL01.10600WA
				BL01.10600JB
				BL01.10600AG
				BL01.10600TG
15	1200	3000	⚡ AC220~240V ON/OFF	BL01.15600WA
				BL01.15600JB
				BL01.15600AG
				BL01.15600TG




ATLAS LED BOLLARD 800MM Φ120



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
10	800	3000	⚡ AC220~240V ON/OFF	BL01.10800WA
				BL01.10800JB
				BL01.10800AG
				BL01.10800TG
15	1200	3000	⚡ AC220~240V ON/OFF	BL01.15800WA
				BL01.15800JB
				BL01.15800AG
				BL01.15800TG

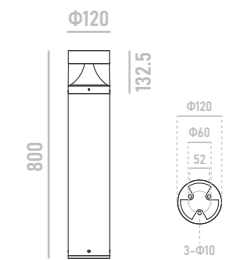


ATLAS LED BOLLARD 1000MM Φ120




* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
10	800	3000	⚡ AC220~240V ON/OFF	BL01.101000WA
				BL01.101000JB
				BL01.101000AG
				BL01.101000TG
15	1200	3000	⚡ AC220~240V ON/OFF	BL01.151000WA
				BL01.151000JB
				BL01.151000AG
				BL01.151000TG

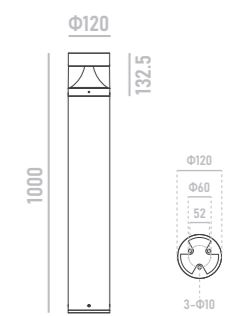

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable






ATLAS LED BOLLARD 600MM Φ160



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
20	1600	3000	⚡ AC220÷240V ON/OFF	BL01.20600WA
				BL01.20600JB
				BL01.20600AG
				BL01.20600TG
30	2400	3000	⚡ AC220÷240V ON/OFF	BL01.30600WA
				BL01.30600JB
				BL01.30600AG
				BL01.30600TG




ATLAS LED BOLLARD 800MM Φ160



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
20	1600	3000	⚡ AC220÷240V ON/OFF	BL01.20800WA
				BL01.20800JB
				BL01.20800AG
				BL01.20800TG
30	2400	3000	⚡ AC220÷240V ON/OFF	BL01.30800WA
				BL01.30800JB
				BL01.30800AG
				BL01.30800TG

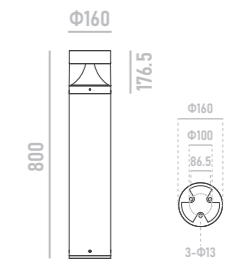


ATLAS LED BOLLARD 1000MM Φ160




* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
20	1600	3000	⚡ AC220÷240V ON/OFF	BL01.201000WA
				BL01.201000JB
				BL01.201000AG
				BL01.201000TG
30	2400	3000	⚡ AC220÷240V ON/OFF	BL01.301000WA
				BL01.301000JB
				BL01.301000AG
				BL01.301000TG

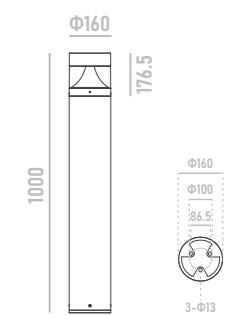

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable

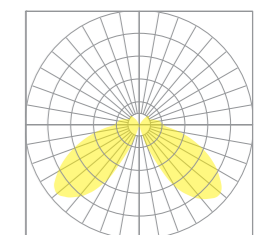

EIKO




- RAL9006
- RAL9005
- RAL7016
- RAL7043

EIKO LED BOLLARD 600MM



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
15	1200	3000	⚡ AC220~240V ON/OFF	BL02.15600WA
				BL02.15600JB
				BL02.15600AG
				BL02.15600TG
30	2400	3000	⚡ AC220~240V ON/OFF	BL02.30600WA
				BL02.30600JB
				BL02.30600AG
				BL02.30600TG




EIKO LED BOLLARD 800MM



* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
15	1200	3000	⚡ AC220~240V ON/OFF	BL02.15800WA
				BL02.15800JB
				BL02.15800AG
				BL02.15800TG
30	2400	3000	⚡ AC220~240V ON/OFF	BL02.30800WA
				BL02.30800JB
				BL02.30800AG
				BL02.30800TG

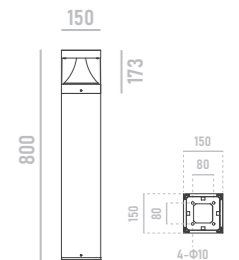


EIKO LED BOLLARD 1000MM




* DALI control available on request
* Custom RAL colours available on request

W	LM	K	COL.	CODE
15	1200	3000	⚡ AC220~240V ON/OFF	BL02.151000WA
				BL02.151000JB
				BL02.151000AG
				BL02.151000TG
30	2400	3000	⚡ AC220~240V ON/OFF	BL02.301000WA
				BL02.301000JB
				BL02.301000AG
				BL02.301000TG

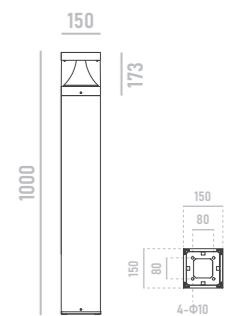

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable

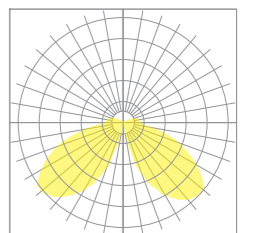

GIGA



RAL9006

RAL9005

RAL7016


RAL7043

GIGA LED BOLLARD 600MM



* DALI control available on request
* Custom RAL colours available on request

W	LM	K		COL.	CODE
10	800	3000	⚡ AC220~240V ON/OFF		BL03.10600WA
					BL03.10600JB
					BL03.10600AG
					BL03.10600TG
20	1600	3000	⚡ AC220~240V ON/OFF		BL03.20600WA
					BL03.20600JB
					BL03.20600AG
					BL03.20600TG




GIGA LED BOLLARD 800MM




* DALI control available on request
* Custom RAL colours available on request

W	LM	K		COL.	CODE
10	800	3000	⚡ AC220~240V ON/OFF		BL03.10800WA
					BL03.10800JB
					BL03.10800AG
					BL03.10800TG
20	1600	3000	⚡ AC220~240V ON/OFF		BL03.20800WA
					BL03.20800JB
					BL03.20800AG
					BL03.20800TG

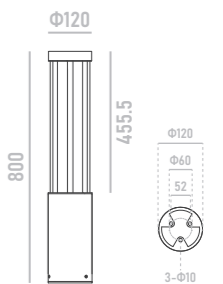

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable






LONG LED BOLLARD 400MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL04.10400WA
			●	BL04.10400JB
			■	BL04.10400AG
			■	BL04.10400TG

AC220~240V ON/OFF




* DALI control available on request
* Custom RAL colours available on request

LONG LED BOLLARD 600MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL04.10600WA
			●	BL04.10600JB
			■	BL04.10600AG
			■	BL04.10600TG

AC220~240V ON/OFF




* DALI control available on request
* Custom RAL colours available on request

LONG LED BOLLARD 800MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL04.10800WA
			●	BL04.10800JB
			■	BL04.10800AG
			■	BL04.10800TG


AC220~240V ON/OFF

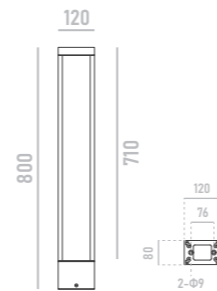

* DALI control available on request
* Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable



LONG



RAL9006

RAL9005

RAL7016

RAL7043






ZEE LED BOLLARD 400MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL05.10400WA
			●	BL05.10400JB
			■	BL05.10400AG
			■	BL05.10400TG

AC220~240V ON/OFF




* DALI control available on request
* Custom RAL colours available on request

ZEE LED BOLLARD 600MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL05.10600WA
			●	BL05.10600JB
			■	BL05.10600AG
			■	BL05.10600TG

AC220~240V ON/OFF




* DALI control available on request
* Custom RAL colours available on request

ZEE LED BOLLARD 800MM



W	LM	K	COL.	CODE
10	800	3000	☐	BL05.10800WA
			●	BL05.10800JB
			■	BL05.10800AG
			■	BL05.10800TG


AC220~240V ON/OFF

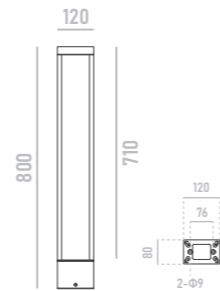


* DALI control available on request
* Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable



ZEE

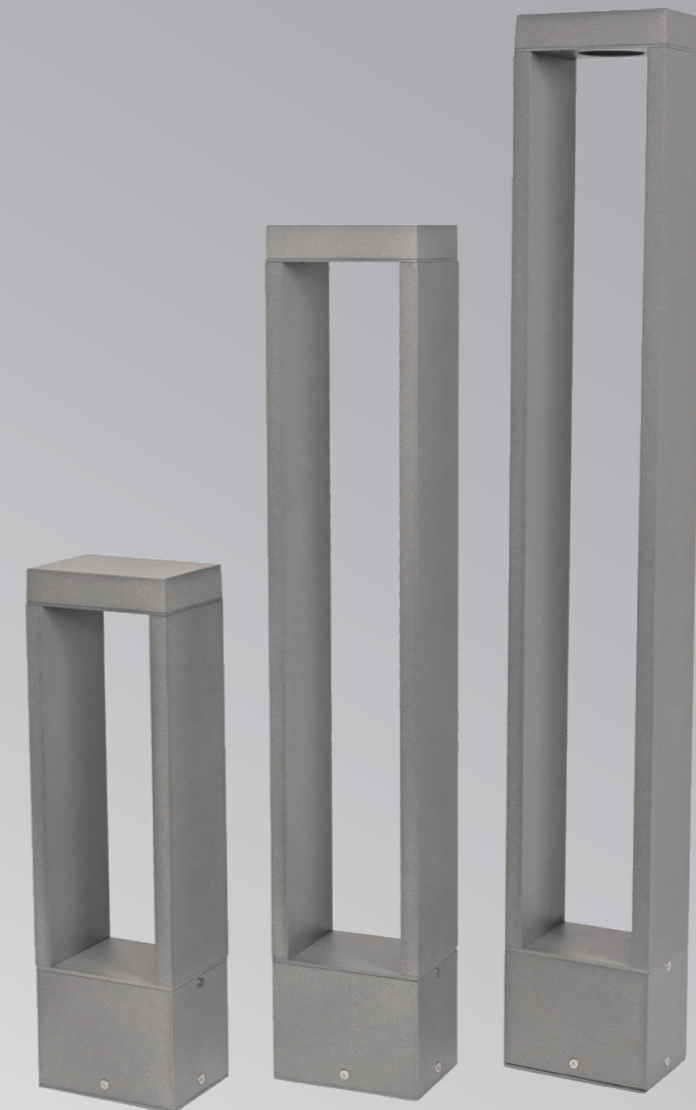

RAL9006

RAL9005

RAL7016

RAL7043



KISA LED BOLLARD 650MM

W	LM	K	COL.	CODE
10	800	3000		BL06.10650WA
				BL06.10650JB
				BL06.10650AG
				BL06.10650TG

AC220~240V ON/OFF

* DALI control available on request
* Custom RAL colours available on request

KISA LED BOLLARD 800MM

W	LM	K	COL.	CODE
10	800	3000		BL06.10800WA
				BL06.10800JB
				BL06.10800AG
				BL06.10800TG

AC220~240V ON/OFF

* DALI control available on request
* Custom RAL colours available on request

KISA LED BOLLARD 1000MM


W	LM	K	COL.	CODE
10	800	3000		BL06.101000WA
				BL06.101000JB
				BL06.101000AG
				BL06.101000TG

AC220~240V ON/OFF

* DALI control available on request
* Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable



KISA



-
-
-
-

KUBIX




- RAL9006
- RAL9005
- RAL7016
- RAL7043

KUBIX LED BOLLARD 800MM



W	LM	K	
10	800	3000	⚡ AC220÷240V ON/OFF


COL.	CODE
	BL07.10800WA
	BL07.10800JB
	BL07.10800AG
	BL07.10800TG

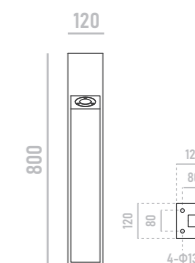

* DALI control available on request
 * Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable





CLIVO




- RAL9006
- RAL9005
- RAL7016
- RAL7043

CLIVO LED BOLLARD 600MM SINGLE-LIGHT



W	LM	K
12	960	3000

COL.	CODE
	BL08.12600WA
	BL08.12600JB
	BL08.12600AG
	BL08.12600TG

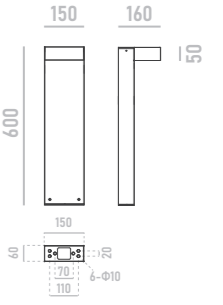


* DALI control available on request
* Custom RAL colours available on request

CLIVO LED BOLLARD 800MM SINGLE-LIGHT



W	LM	K
12	960	3000


COL.	CODE
	BL08.12800WA
	BL08.12800JB
	BL08.12800AG
	BL08.12800TG

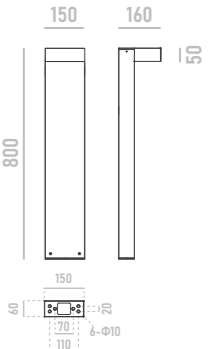

* DALI control available on request
* Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable






CLIVO LED BOLLARD 600MM DOUBLE-LIGHT




W	LM	K	
2x12	1920	3000	AC220÷240V ON/OFF

COL.	CODE
	BL08.2X12600WA
	BL08.2X12600JB
	BL08.2X12600AG
	BL08.2X12600TG

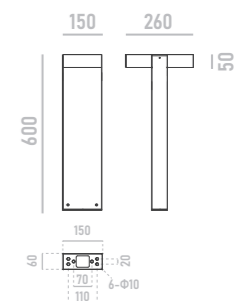


* DALI control available on request
* Custom RAL colours available on request

CLIVO LED BOLLARD 800MM DOUBLE-LIGHT



W	LM	K	
2x12	1920	3000	AC220÷240V ON/OFF


COL.	CODE
	BL08.2X12800WA
	BL08.2X12800JB
	BL08.2X12800AG
	BL08.2X12800TG

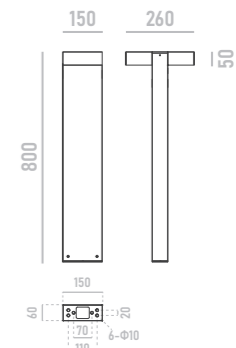

* DALI control available on request
* Custom RAL colours available on request

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable

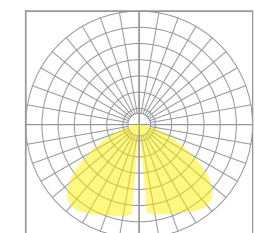



FLAT LED BOLLARD 400MM

		<p>* DALI control available on request * Custom RAL colours available on request</p>	<table border="1"> <thead> <tr> <th>W</th> <th>LM</th> <th>K</th> <th>COL.</th> <th>CODE</th> </tr> </thead> <tbody> <tr> <td rowspan="4">10</td> <td rowspan="4">800</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.10400WA</td> </tr> <tr> <td> BL09.10400JB</td> </tr> <tr> <td> BL09.10400AG</td> </tr> <tr> <td> BL09.10400TG</td> </tr> <tr> <td rowspan="4">20</td> <td rowspan="4">1600</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.20400WA</td> </tr> <tr> <td> BL09.20400JB</td> </tr> <tr> <td> BL09.20400AG</td> </tr> <tr> <td> BL09.20400TG</td> </tr> </tbody> </table>	W	LM	K	COL.	CODE	10	800	3000	⚡ AC220~240V ON/OFF	BL09.10400WA	BL09.10400JB	BL09.10400AG	BL09.10400TG	20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20400WA	BL09.20400JB	BL09.20400AG	BL09.20400TG	
W	LM	K	COL.	CODE																					
10	800	3000	⚡ AC220~240V ON/OFF	BL09.10400WA																					
				BL09.10400JB																					
				BL09.10400AG																					
				BL09.10400TG																					
20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20400WA																					
				BL09.20400JB																					
				BL09.20400AG																					
				BL09.20400TG																					

FLAT LED BOLLARD 600MM



		<p>* DALI control available on request * Custom RAL colours available on request</p>	<table border="1"> <thead> <tr> <th>W</th> <th>LM</th> <th>K</th> <th>COL.</th> <th>CODE</th> </tr> </thead> <tbody> <tr> <td rowspan="4">10</td> <td rowspan="4">800</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.10600WA</td> </tr> <tr> <td> BL09.10600JB</td> </tr> <tr> <td> BL09.10600AG</td> </tr> <tr> <td> BL09.10600TG</td> </tr> <tr> <td rowspan="4">20</td> <td rowspan="4">1600</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.20600WA</td> </tr> <tr> <td> BL09.20600JB</td> </tr> <tr> <td> BL09.20600AG</td> </tr> <tr> <td> BL09.20600TG</td> </tr> </tbody> </table>	W	LM	K	COL.	CODE	10	800	3000	⚡ AC220~240V ON/OFF	BL09.10600WA	BL09.10600JB	BL09.10600AG	BL09.10600TG	20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20600WA	BL09.20600JB	BL09.20600AG	BL09.20600TG	
W	LM	K	COL.	CODE																					
10	800	3000	⚡ AC220~240V ON/OFF	BL09.10600WA																					
				BL09.10600JB																					
				BL09.10600AG																					
				BL09.10600TG																					
20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20600WA																					
				BL09.20600JB																					
				BL09.20600AG																					
				BL09.20600TG																					

FLAT LED BOLLARD 800MM

		<p>* DALI control available on request * Custom RAL colours available on request</p>	<table border="1"> <thead> <tr> <th>W</th> <th>LM</th> <th>K</th> <th>COL.</th> <th>CODE</th> </tr> </thead> <tbody> <tr> <td rowspan="4">10</td> <td rowspan="4">800</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.10800WA</td> </tr> <tr> <td> BL09.10800JB</td> </tr> <tr> <td> BL09.10800AG</td> </tr> <tr> <td> BL09.10800TG</td> </tr> <tr> <td rowspan="4">20</td> <td rowspan="4">1600</td> <td rowspan="4">3000</td> <td rowspan="4">⚡ AC220~240V ON/OFF</td> <td> BL09.20800WA</td> </tr> <tr> <td> BL09.20800JB</td> </tr> <tr> <td> BL09.20800AG</td> </tr> <tr> <td> BL09.20800TG</td> </tr> </tbody> </table>	W	LM	K	COL.	CODE	10	800	3000	⚡ AC220~240V ON/OFF	BL09.10800WA	BL09.10800JB	BL09.10800AG	BL09.10800TG	20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20800WA	BL09.20800JB	BL09.20800AG	BL09.20800TG	
W	LM	K	COL.	CODE																					
10	800	3000	⚡ AC220~240V ON/OFF	BL09.10800WA																					
				BL09.10800JB																					
				BL09.10800AG																					
				BL09.10800TG																					
20	1600	3000	⚡ AC220~240V ON/OFF	BL09.20800WA																					
				BL09.20800JB																					
				BL09.20800AG																					
				BL09.20800TG																					

LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable

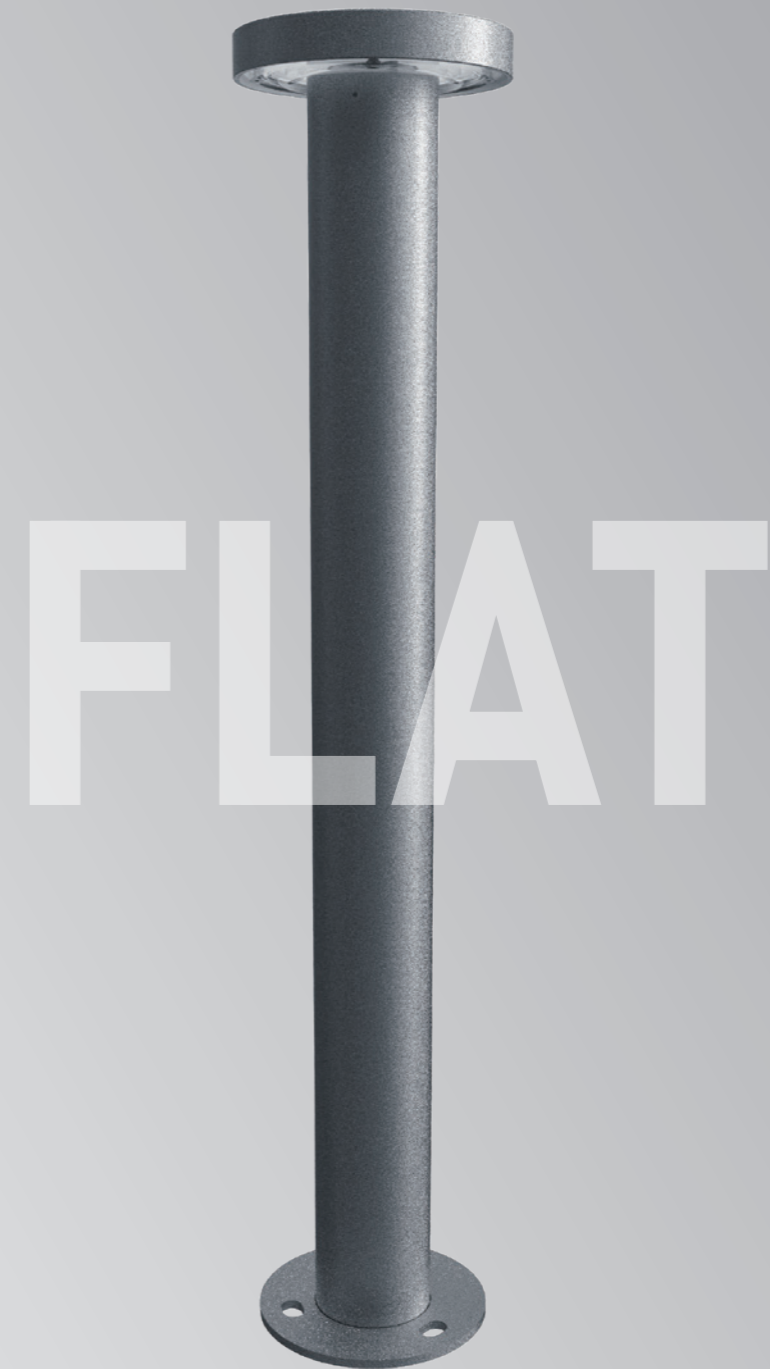

- RAL9006
- RAL9005
- RAL7016
- RAL7043



PORTO LED BOLLARD 1-WAY




W	LM	K		COL.	CODE
10	800	3000	⚡ AC220÷240V ON/OFF		BL10.10X1WA
					BL10.10X1JB
					BL10.10X1AG
					BL10.10X1TG
20	1600	3000	⚡ AC220÷240V ON/OFF		BL10.20X1WA
					BL10.20X1JB
					BL10.20X1AG
					BL10.20X1TG



* DALI control available on request
* Custom RAL colours available on request

PORTO

PORTO LED BOLLARD 2-WAY




W	LM	K		COL.	CODE
10	800	3000	⚡ AC220÷240V ON/OFF		BL10.10X2WA
					BL10.10X2JB
					BL10.10X2AG
					BL10.10X2TG
20	1600	3000	⚡ AC220÷240V ON/OFF		BL10.20X2WA
					BL10.20X2JB
					BL10.20X2AG
					BL10.20X2TG



* DALI control available on request
* Custom RAL colours available on request

PORTO LED BOLLARD 4-WAY



W	LM	K		COL.	CODE
10	800	3000	⚡ AC220÷240V ON/OFF		BL10.10X4WA
					BL10.10X4JB
					BL10.10X4AG
					BL10.10X4TG
20	1600	3000	⚡ AC220÷240V ON/OFF		BL10.20X4WA
					BL10.20X4JB
					BL10.20X4AG
					BL10.20X4TG




* DALI control available on request
* Custom RAL colours available on request



LUMINAIRE:

- Die-cast aluminum heatsink with extruded aluminum body
- Optimal visual comfort
- Replaceable LED light source and power supply
- Customizable pole height & finish colours
- Bollard installation outdoor, supplied with power cable



RAL9006

RAL9005

RAL7016

RAL7043

DAOU[®]

HAINING DAOU LIGHTING CO., LTD.

No.23, Wenli Road, 314400 Haining Zhejiang, CHINA

Tel.: +86-573-80782850 Fax: +86-573-80782852

export@daoultd.com www.daoultd.com



We reserve the right to amend all the technical specifications of the luminaires at any time and without prior notice, depending on the progress of research and product development
The present catalogue replaces the previous ones
Unauthorized reproductions and copies are prohibited

DAOU[®]

LIGHT THE WAY

For more information
about our products please scan the QR-Code
or visit our website www.daould.com

